


PEDITRED LP WITH NO FRAME

INSERT STYLE: INSERT COLOR: CATALOG NUMBER: G3 PART NUMBER:


NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY

							
EXTERIOR CARPET G3EC 19C005XXX	HEAVY-DUTY CARPET G3HC 19C010XXX	CARPET G3CP 19C008XXX	VINYL G3V 19V002XXX	VINYL-ABRASIVE G3VA 19A003XXX	SERRATED ALUM. INSERT G3SA1 19A001XXX	POURED ABRASIVE INSERT G3PA 19M002XXX	

PEDITRED INSERT STYLES

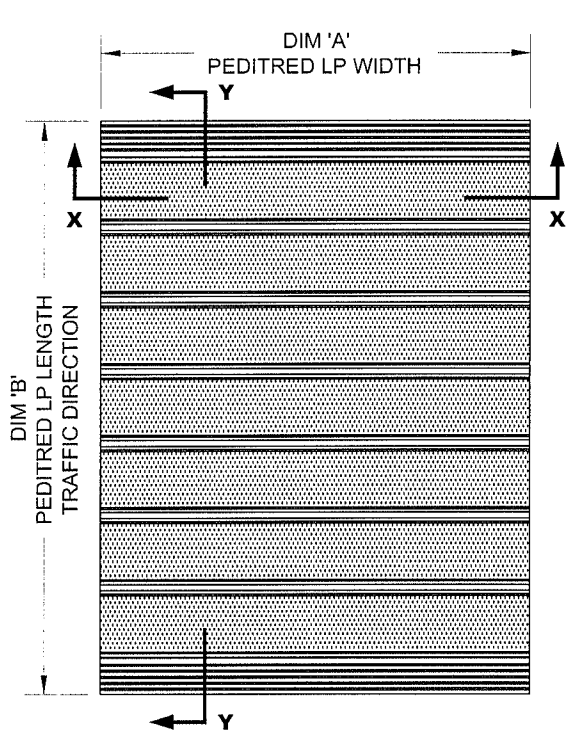

TYPICAL PLAN VIEW

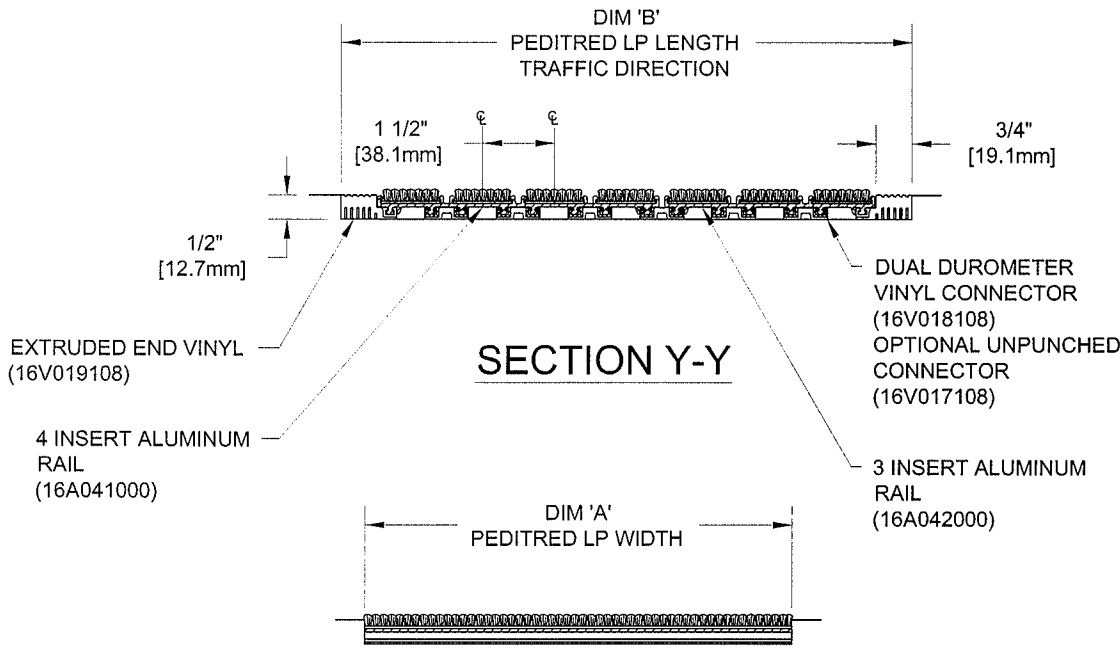

SECTION Y-Y

SECTION X-X

NOTES:

- *ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER
- *PLEASE VERIFY TRAFFIC DIRECTION
- *PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD. LARGER LOADING MAY BE ACCOMMODATED. CONTACT C/S SALES WITH SPECIFIC LOADING REQUIREMENTS.
- *MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A")
- *DUE TO 1-1/2" MODULE OF PEDITRED LP, INSIDE OF FRAME DIMENSION SHOULD BE CHANGED ONLY IN INCREMENTS OF 1-1/2" [38.10mm] TO AVOID THE USE OF EXTRUDED END VINYLs.
- *ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.
- *SUPPLIED IN STANDARD MILL FINISH. (OPTIONAL FINISHES AVAILABLE AT ADDITIONAL COST)

PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' WIDTH	FINISH	NOTES

C/S GROUP

PROJECT: _____

LOCATION: _____

CONTRACTOR: _____

AGENT: _____ SHT: _____

DRG. BY: _____ DATE: _____ JOB NO.: _____