



- | | | | | | | |
|--|--|--|--|---|--|--|
|  |  |  |  |  |  |  |
| EXTERIOR CARPET M2EC
19C005XXX | HEAVY-DUTY CARPET M2HC
19C010XXX | CARPET M2CP
19C008XXX | VINYL M2V
19V002XXX | VINYL-ABRASIVE M2VA
19A003XXX | SERRATED ALUM. INSERT M2SAI
19A001XXX | POURED ABRASIVE INSERT M2PA
19M002XXX |


PEDIMAT AA INSERT STYLES

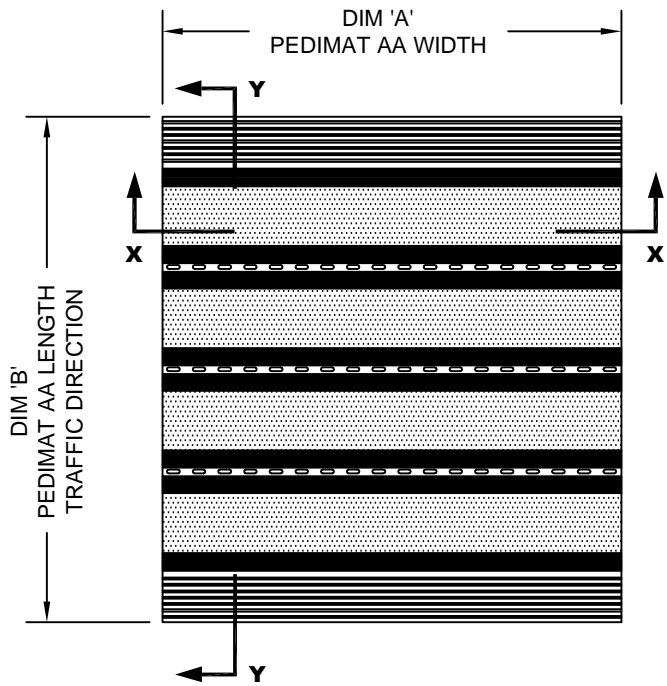

TYPICAL PLAN VIEW

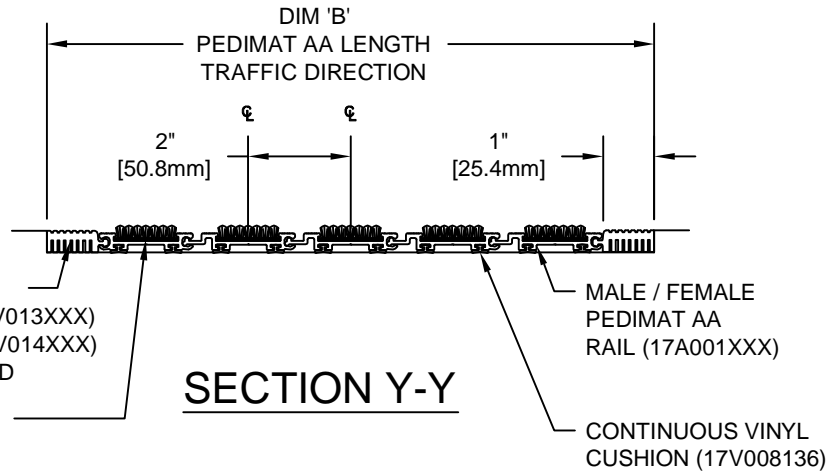

SECTION Y-Y

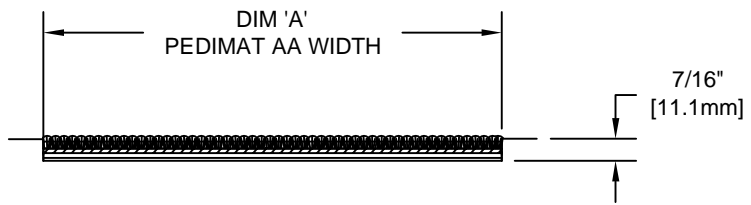

SECTION X-X

NOTES:

- *ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER
- *PLEASE VERIFY TRAFFIC DIRECTION
- *PEDIMAT AA SHALL BE ABLE TO SUPPORT A 300 LB. ROLLING LOAD. LARGER LOADING MAY BE ACCOMMODATED. CONTACT C/S SALES WITH SPECIFIC LOADING REQUIREMENTS.
- *MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A")
- *DUE TO 2" [50.8mm] MODULE OF PEDIMAT AA, INSIDE OF FRAME DIMENSION SHOULD BE CHANGED ONLY IN INCREMENTS OF 2" [50.8mm] TO AVOID THE USE OF EXTRUDED END VINYLs.
- *ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.



PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES	PROJECT:		
									LOCATION:		
									CONTRACTOR:		
									AGENT:		SHT:
									DRG. BY:	DATE:	JOB NO.: