

PEDIMAT WITH ALUMINUM TAPERED ANGLE FRAME

INSERT STYLE:




INSERT COLOR:


CATALOG NUMBER: M1

PART NUMBER:

NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY

PEDIMAT INSERT STYLES

			
EXTERIOR CARPET M1EC 19C005XXX	HEAVY-DUTY CARPET M1HC 19C010XXX	CARPET M1CP 19C008XXX	VINYL M1V 19V002XXX

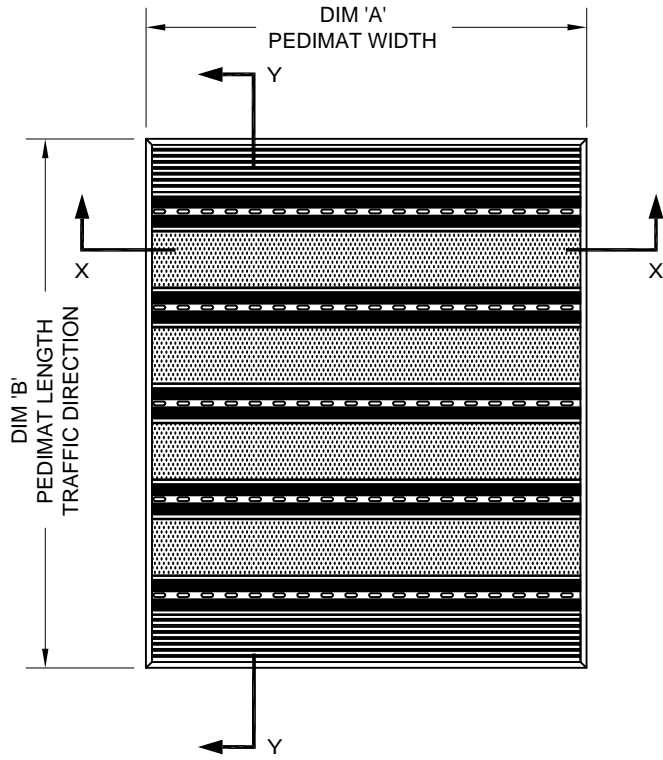


TYPICAL PLAN VIEW


SQUARE END VINYL
1" (25.4mm) WIDE (17V011XXX)
2" (50.8mm) WIDE (17V012XXX)
TO BE FIELD TRIMMED

ALUMINUM TAPERED
ANGLE FRAME (16A051XXX)

EXTRUDED ALUMINUM
CONNECTING RAIL (17A009XXX)

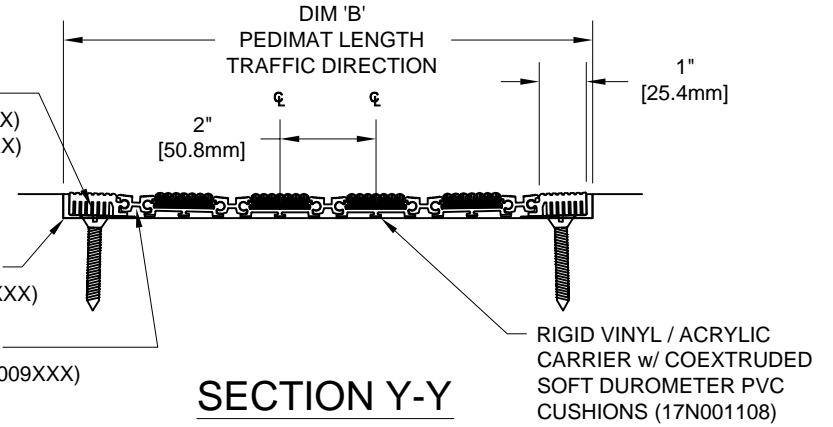

SECTION Y-Y

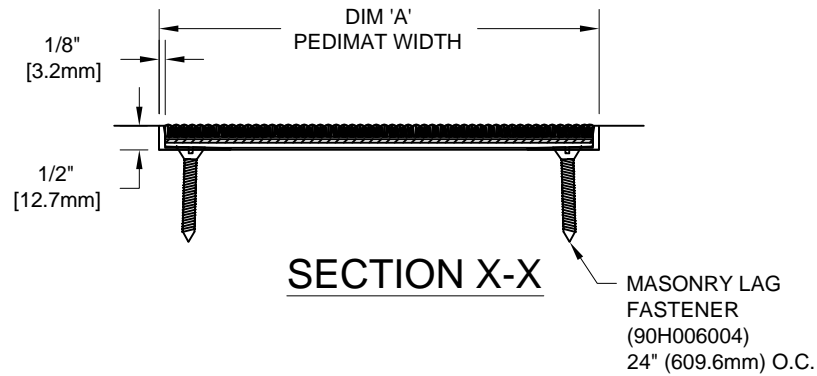

SECTION X-X

NOTES:

*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER

*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A")

*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

*PLEASE VERIFY TRAFFIC DIRECTION

*DUE TO 2" [50.8mm] MODULE OF PEDIMAT, INSIDE OF FRAME DIMENSION SHOULD BE CHANGED ONLY IN INCREMENTS OF 2" [50.8mm] TO AVOID THE USE OF EXTRUDED END VINYLs.

*PEDIMAT SHALL BE ABLE TO SUPPORT A 300 LB. ROLLING LOAD. LARGER LOADING MAY BE ACCOMODATED. CONTACT C/S SALES WITH SPECIFIC LOADING REQUIREMENTS.

Construction Specialties, Inc.



PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' TRAFFIC DIR	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: